



# ENK OPEN TYPE

For installation information please refer to the tooling overview and manuals on our website [www.scell-it.com](http://www.scell-it.com)  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.



ENK-FICHE

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Insert / Knurled	Ecrou / Cranté	Einnietmutter / Gerillt	nýtovací matice / s rýhovaným dřikem
Countersunk head	Tête fraisée à 90°	Senkkopf	zapuštěná hlava
Stainless steel A2	Inox A2	Edelstahl A2	nerez A2

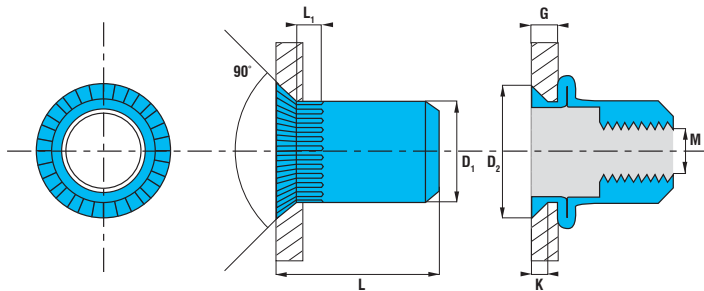

PART NO/REF	M	D <sub>1</sub>	D <sub>2</sub>	K	L	L <sub>1</sub>	G
	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
ENK0435	M4	5.9	9.0	1.5	11.5	4.5	1.5-3.5
ENK0540	M5	6.9	10.0	1.5	13.5	5.0	1.5-4.0
ENK0645	M6	8.9	12.0	1.5	16.0	5.5	1.5-4.5
ENK0845	M8	10.9	14.0	1.5	19.0	5.5	1.5-4.5
ENK1045	M10	12.9	15.0	1.5	21.0	5.5	1.5-4.5

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	7.0	6 800	2 600
M5	7.0	10.0	11 700	2 900
M6	9.0	20.0	18 000	4 900
M8	11.0	28.0	24 000	6 800
M10	13.0	38.0	29 000	7 800

UNIT PLANT CERTIFICATES



**Scell-it®**  
 Engineering & Development

© 2009 Blue future Intellectual Proterities

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Scell-it representative is at your disposal should you need to confirm latest information.